



Komatsu CD110R

11 Tonne Tracked Dump Truck




Items		Unit	CD110R-1
Operating Weight		Kg	15,900
Engine	Model		Komatsu SAA6D108E.2.A, direct injection turbocharged
	Rated Output	kW(PS)/rpm	194.9 (265)/2,050
	Piston Displacement	Liter(cc)	7.145 (7.145)
Operating Performance	Max. load	Kg	11,000
	Drive		Hydrostatic Drive
	Main brake		Hydrostatic Brake
	Parking brake		Built in motor, automatic activation when the vehicle stops
	No. of travel speeds		2
	Travel speed (forward/reverse)	km/h	High: 10.0 Low: 6.0
	Gradeability	Degree	30
	Ground Pressure	kPa(kg/cm ²)	24.5(0.25)
	Swing Radius	mm	3,190
	Swing Speed	rpm	4
	Max. dumping angle	Degree	60
Undercarriage	Shoe Type		Integrated rubber pad
	Shoe Width	mm	800
	Type of track roller mount		Bogle type
Dimensions	Overall length (transporting)	mm	5,970 (6,245)
	Overall Width (transporting)	mm	3,530 (3,150)
	Overall Height	mm	3,000
	Length of track on ground	mm	3,825
	Track gauge	mm	2,150
	Min. ground clearance	mm	630
	Vessel bottom height	mm	1,770
	Vessel length(inside)	mm	3,685
	Vessel width (inside)	mm	2,750
	Vessel height (inside)	mm	450
	Fuel tank capacity	liter	300

The right advice and the right equipment delivered on time, every time



EXTERNAL DIMENSIONS

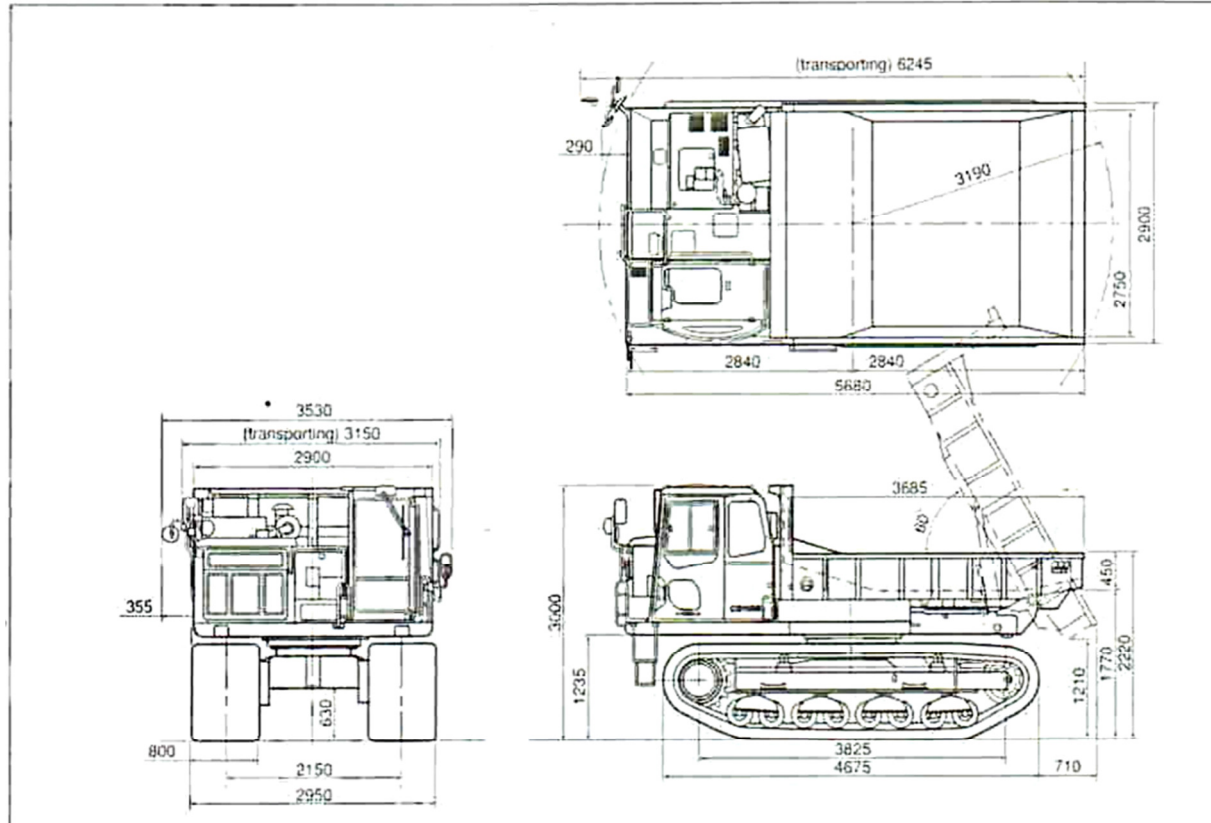

The right advice and the right equipment delivered on time, every time